
DEPLANING LEVEL



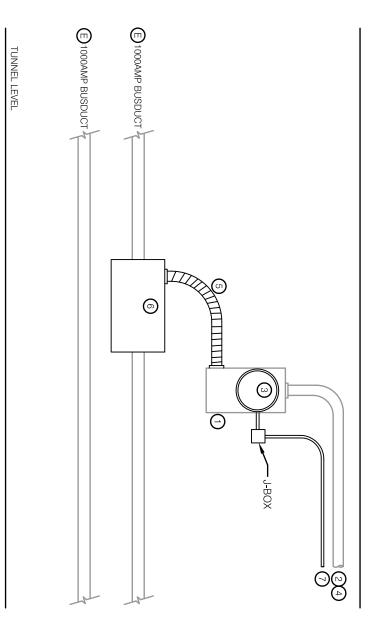

NOTES:

- I. TENANT SHALL COORDINATE WITH THE PORT FOR THE CONNECTION TO THE BUSDUCT AND WHICH BUSDUCT TO USE.
- 2. ITEMS SHOWN AS SCREENED BACK LINES ARE EXISTING.

KEY NOTES:

- (1) EXISTING, METERING SOCKET ENCLOSURE, WALL MOUNTED ABOVE THE EXISTING BUSDUCTS.
- ② EXISTING, 2" CONDUIT TO RESPECTIVE RETAIL SPACES.
- (3) BY TENANT: PROVIDE METER PER TENANT STANDARDS.
- (4) BY TENANT: PROVIDE CONDUCTOR FROM THE METER ENCLOSURE TO THE LEASE SPACE.
- BY TENANT: PROVIDE SEALTIGHT FLEX CONDUIT AND CONDUCTORS BETWEEN THE METER ENCLOSURE AND BUSPLUG UNIT.
- 6 BY TENANT: PROVIDE BUSDUCT PLUG-IN OVERCURRENT EQUIPMENT.
- (7) BY TENANT: PROVIDE DATA CONDUIT AND 2/C #18 SH CABLE TO TERMINAL REVENUE METERING SYSTEM.